

# DEEP GROOVE BALL BEARINGS

## BEARING FEATURES

Deep groove ball bearings incorporate grooved raceways on both the inner ring and outer ring, which enable them to sustain moderate axial loads in both directions in addition to radial loads. Balls are separated by steel cages, permitting high-speed operation. Double row angular contact bearings are designed to accommodate combined simultaneous acting axial and radial loads. Balls are normally separated by high-speed Polyamide cages.

Most bearings are prelubricated with Mobil Polyrex EM grease or Chevron SRI-2, which provides excellent lubrication up to 350°F. Sealed and shielded bearings are lubricated for life.

### Bearing Steel

Standard bearings utilize high quality 52100 through hardened steel. Stainless steel units utilize high quality AISI 440C stainless steel to combine corrosion resistance and provide hardness and strength.

### Bearing Configurations

IDC Select radial ball bearings are manufactured as either sealed (2RS), shielded (ZZ) or open. Many bearings can also be supplied with snap rings (NR).

Sealed (2RS) bearings feature contact lip seals that provide excellent protection from liquids and contamination. However, seal rubbing can result in friction (drag) and produce heat, which could be a concern in high-speed applications.

Shielded (ZZ) bearings have non-contact steel shields that do not protect against liquids but add no friction or heat build-up during operation.

Open bearings are supplied with a coating of light oil and are used in oil bath and oil mist environments.


Snap ring (NR) bearings are supplied with snap ring grooves and snap rings installed on the OD. (NOTE: Not all bearings are available as NR.)



# DEEP GROOVE BALL BEARINGS


## PART NUMBER NOMENCLATURE

Each IDC Select Deep Groove Ball Bearing part number is a unique combination indicating the bearing's type, series, internal clearance, bore size, seal and shields.

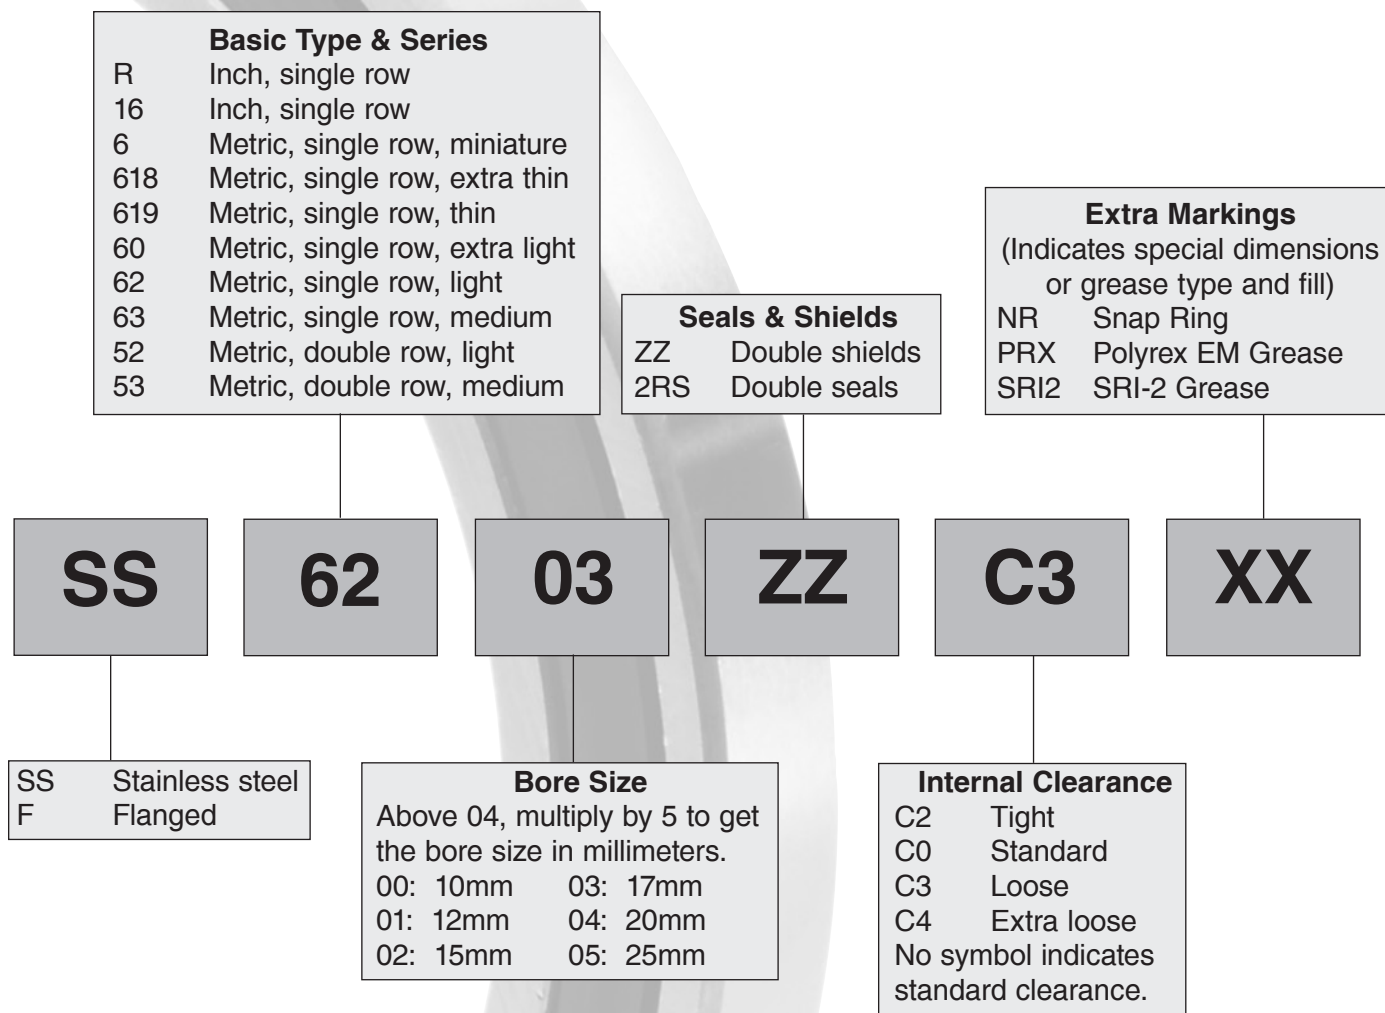

# RADIAL BALL BEARINGS

## 6000 SERIES EXTRA LIGHT DUTY - METRIC

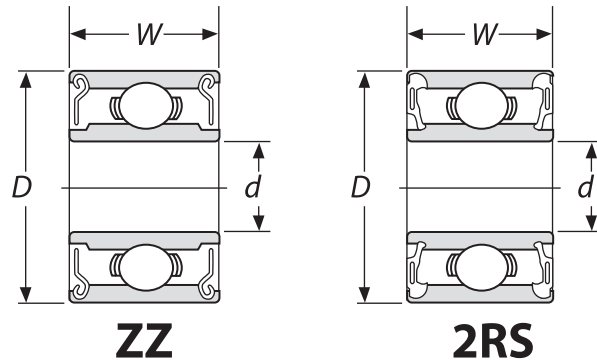

Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
				Dynamic	Static	Grease RPM	Oil RPM	
10	26	8	<b>6000</b>	1030	440	29000	34000	0.042
12	28	8	<b>6001</b>	1150	540	26000	30000	0.050
15	32	9	<b>6002</b>	1260	640	15000	28000	0.070
17	35	10	<b>6003</b>	1350	730	13000	26000	0.090
20	42	12	<b>6004</b>	2110	1140	18000	21000	0.150
25	47	12	<b>6005</b>	2260	1320	15000	18000	0.180
30	55	13	<b>6006</b>	2970	1860	13000	15000	0.260
35	62	14	<b>6007</b>	3600	2310	12000	14000	0.340
40	68	15	<b>6008</b>	3750	2590	10000	12000	0.420
45	75	16	<b>6009</b>	4720	3400	9000	11000	0.520
50	80	16	<b>6010</b>	4900	3700	8400	9800	0.570
55	90	18	<b>6011</b>	6350	4850	7700	9000	0.850
60	95	18	<b>6012</b>	6600	5200	7000	8300	0.915
65	100	18	<b>6013</b>	6850	5850	6500	7700	0.930
70	110	20	<b>6014</b>	8550	6950	6100	7100	1.330
75	115	20	<b>6015</b>	8890	7550	5700	6700	1.430
80	125	22	<b>6016</b>	10700	8950	5300	6200	1.880
85	130	22	<b>6017</b>	11100	9700	5000	5900	1.960
90	140	24	<b>6018</b>	13100	11200	4750	5600	2.560
95	145	24	<b>6019</b>	13600	12100	4300	5300	2.670
100	150	24	<b>6020</b>	14200	12200	4000	5000	2.760
105	160	26	<b>6021</b>	16300	14800	3700	4700	3.510
110	170	28	<b>6022</b>	18400	16400	3350	4300	4.320


\* Also available with snap ring (NR suffix)

**IDC**  
**SELECT**


www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

## 6200 SERIES LIGHT DUTY - METRIC



**ZZ**



**2RS**



Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating		Speed Rating		Weight (lb)
				Pounds		Grease RPM	Oil RPM	
				Dynamic	Static			
10	30	9	<b>6200</b>	1150	540	24000	30000	0.07
12	32	10	<b>6201</b>	1530	690	22000	26000	0.08
15	35	11	<b>6202</b>	1740	805	19000	23000	0.10
17	40	12	<b>6203</b>	2150	1080	12000	20000	0.15
20	47	14	<b>6204</b>	2880	1490	11000	18000	0.24
25	52	15	<b>6205</b>	3150	1770	10500	15000	0.28
30	62	16	<b>6206</b>	4390	2540	10000	13000	0.44
35	72	17	<b>6207</b>	5800	3400	9800	11000	0.63
40	80	18	<b>6208</b>	6500	4000	8700	10000	0.80
45	85	19	<b>6209</b>	7300	4600	7800	9200	0.88
50	90	20	<b>6210</b>	7870	5200	7100	8300	1.02
55	100	21	<b>6211</b>	9750	6500	6400	7600	1.34
60	110	22	<b>6212</b>	11800	8150	6000	7000	1.70
65	120	23	<b>6213</b>	12900	9000	5400	6500	2.22
70	125	24	<b>6214</b>	14000	9900	5100	6000	2.41
75	130	25	<b>6215</b>	14900	11100	4800	5600	2.59
80	140	26	<b>6216</b>	16300	11900	4500	5300	3.13
85	150	28	<b>6217</b>	18700	14300	4200	5000	3.94
90	160	30	<b>6218</b>	21600	16100	3950	4750	4.74
95	170	32	<b>6219</b>	24500	18400	3600	4450	5.78
100	180	34	<b>6220</b>	27500	20900	3350	4200	6.90
105	190	36	<b>6221</b>	29900	23500	3050	3950	8.14
110	200	38	<b>6222</b>	32500	26300	2875	3700	9.61


\* Also available with snap ring (NR suffix)

**IDC  
SELECT**

www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

## 6300 SERIES MEDIUM DUTY - METRIC

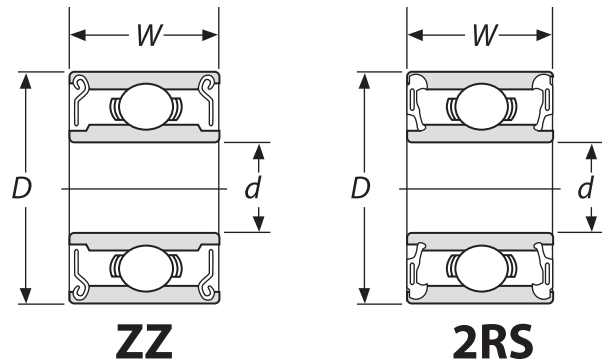

Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
				Dynamic	Static	Grease RPM	Oil RPM	
10	35	11	<b>6300</b>	1820	780	17000	26000	0.11
12	37	12	<b>6301</b>	2180	950	16000	24000	0.13
15	42	13	<b>6302</b>	2570	1230	13000	20000	0.18
17	47	14	<b>6303</b>	3060	1470	11000	18000	0.25
20	52	15	<b>6304</b>	3580	1780	10000	17000	0.32
25	62	17	<b>6305</b>	4640	2520	9500	13000	0.52
30	72	19	<b>6306</b>	6000	3370	9000	12000	0.80
35	80	21	<b>6307</b>	7500	4300	8500	10000	1.00
40	90	23	<b>6308</b>	9100	5400	7800	9200	1.40
45	100	25	<b>6309</b>	11900	7200	6700	8000	1.80
50	110	27	<b>6310</b>	13900	8600	6400	7500	2.40
55	120	29	<b>6311</b>	16100	10100	5800	6800	3.02
60	130	31	<b>6312</b>	18400	11700	5400	6300	3.81
65	140	33	<b>6313</b>	20800	13400	4900	5800	4.70
70	150	35	<b>6314</b>	23400	15300	4600	5400	5.72
75	160	37	<b>6315</b>	25500	17400	4300	5000	6.84
80	170	39	<b>6316</b>	27600	19500	4000	4700	8.13
85	180	41	<b>6317</b>	29800	21800	3800	4500	9.53
90	190	43	<b>6318</b>	32000	24100	3600	4300	10.80
95	200	45	<b>6319</b>	34500	26600	3400	4100	12.50
100	215	47	<b>6320</b>	39000	31500	3200	3950	15.40
105	225	49	<b>6321</b>	41500	34500	3000	3750	17.70
110	240	50	<b>6322</b>	43500	40500	2850	3500	21.00


\* Also available with snap ring (NR suffix)

**IDC**  
**SELECT**


www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

## 61800 SERIES EXTRA THIN SECTION - METRIC



**ZZ**



**2RS**




Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating		Speed Rating		Weight (lb)
				Pounds		Grease RPM	Oil RPM	
				Dynamic	Static			
10	19	5	<b>61800</b>	410	208	36000	43000	0.01
12	21	5	<b>61801</b>	430	220	20000	38000	0.01
15	24	5	<b>61802</b>	470	290	17000	34000	0.02
17	26	5	<b>61803</b>	630	385	15000	30000	0.02
20	32	7	<b>61804</b>	900	560	13000	26000	0.04
25	37	7	<b>61805</b>	1010	710	12000	22000	0.05
30	42	7	<b>61806</b>	1060	820	11000	18000	0.05
35	47	7	<b>61807</b>	1100	920	10500	16000	0.06
40	52	7	<b>61808</b>	1140	980	10000	14000	0.07
45	58	7	<b>61809</b>	1419	1270	9500	12000	0.09
50	65	7	<b>61810</b>	1480	1370	9000	11000	0.12
55	72	9	<b>61811</b>	1980	1820	8700	10000	0.18
60	78	10	<b>61812</b>	2580	2380	8000	9400	0.23
65	85	10	<b>61813</b>	2610	2480	7400	8700	0.28
70	90	10	<b>61814</b>	2720	2680	6900	8100	0.30
75	95	10	<b>61815</b>	2820	2890	6400	7600	0.32

**IDC  
SELECT**

www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

## 61900 SERIES THIN SECTION - METRIC

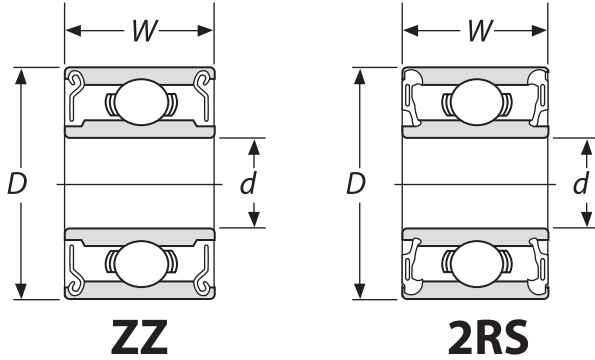


Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
				Dynamic	Static	Grease RPM	Oil RPM	
10	22	6	<b>61900</b>	610	290	28000	38000	0.02
12	24	6	<b>61901</b>	650	330	27000	36000	0.02
15	28	7	<b>61902</b>	980	510	24000	30000	0.03
17	30	7	<b>61903</b>	1040	570	22000	28000	0.04
20	37	9	<b>61904</b>	1440	830	18000	22000	0.08
25	42	9	<b>61905</b>	1590	1020	15000	19000	0.09
30	47	9	<b>61906</b>	1630	1130	13000	17000	0.11
35	55	10	<b>61907</b>	2390	1630	11000	15000	0.17
40	62	12	<b>61908</b>	3080	2250	10000	13000	0.25
45	68	12	<b>61909</b>	3400	2530	9000	12000	0.28
50	72	12	<b>61910</b>	3500	2750	8000	11000	0.29
55	80	13	<b>61911</b>	3600	2980	7000	9600	0.40
60	85	13	<b>61912</b>	3700	3200	6500	8900	0.42
65	90	13	<b>61913</b>	4610	3480	6000	8200	0.45
70	100	16	<b>61914</b>	5350	4750	5700	7700	0.74
75	105	16	<b>61915</b>	5500	5100	5400	7200	0.78

**IDC**  
**SELECT**


www.IDC-USA.com • 317-244-9200

# MINIATURE BALL BEARINGS

## 600 SERIES - METRIC



**ZZ**




**2RS**




Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
				Dynamic	Static	Grease RPM	Oil RPM	
3	10	4	<b>623</b>	140	50	50000	60000	.003
4	13	5	<b>624</b>	290	110	40000	48000	.006
4	16	5	<b>634</b>	400	150	40000	48000	.012
5	14	5	<b>605</b>	300	115	37000	44000	.008
5	16	5	<b>625</b>	390	150	36000	43000	.011
5	19	6	<b>635</b>	530	200	32000	40000	.018
6	17	6	<b>606</b>	510	190	38000	45000	.015
6	19	6	<b>626</b>	530	200	32000	40000	.017
6	22	7	<b>636</b>	750	320	30000	36000	.032
7	17	5	<b>697</b>	360	160	36000	43000	.011
7	19	6	<b>607</b>	525	205	36000	43000	.018
7	22	7	<b>627</b>	740	310	30000	36000	.028
8	22	7	<b>608</b>	740	310	34000	40000	.028
8	24	8	<b>628</b>	750	320	28000	34000	.038
8	28	9	<b>638</b>	1020	450	28000	34000	.066
9	14	3	<b>679</b>	200	110	36000	42000	.044
9	24	7	<b>609</b>	755	325	32000	38000	.035
9	26	8	<b>629</b>	1020	540	28000	34000	.042

\* Also available open (without shields or seals)



**ZZ**



**2RS**



## “L” SERIES - METRIC

Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
				Dynamic	Static	Grease RPM	Oil RPM	
4	10	4.0	<b>L1040</b>	73	26	45000	54000	.002
5	10	4.0	<b>L1050</b>	73	26	43000	52000	.002
5	11	5.0	<b>L1150</b>	68	26	40000	48000	.002
6	10	3.0	<b>L1060</b>	47	16	40000	48000	.002
6	12	4.0	<b>L1260</b>	85	32	36000	43000	.003
6	13	5.0	<b>L1360</b>	115	49	34000	41000	.004
7	14	5.0	<b>L1470</b>	126	55	31000	37000	.004
8	12	3.5	<b>L1280</b>	52	20	32000	39000	.002
8	14	4.0	<b>L1480</b>	84	32	29000	35000	.004
8	16	5.0	<b>L1680</b>	170	79	27000	32000	.006
9	17	5.0	<b>L1790</b>	183	88	25000	30000	.008
9	20	6.0	<b>L2090</b>	225	108	23000	28000	.016
10	19	7.0	<b>L1910</b>	217	89	23000	28000	.017

\* Also available open. Width may vary.




www.IDC-USA.com • 317-244-9200




# MINIATURE BALL BEARINGS

## “R” SERIES - INCH



**ZZ**



**2RS**

Bore in d	OD in D	Width (ZZ or 2RS) in W	Width (Open) in W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
					Dynamic	Static	Grease RPM	Oil RPM	
0.1250	0.3750	0.1562	0.1562	<b>R2</b>	144	50	49000	55000	0.003
0.1250	0.5000	0.1719	0.1719	<b>R2A</b>	254	90	31000	5100	0.004
0.1875	0.5000	0.1960	0.1562	<b>R3</b>	295	110	41000	48000	0.005
0.2500	0.6250	0.1960	0.1960	<b>R4</b>	335	139	44000	54000	0.010
0.2500	0.7500	0.2812	0.2188	<b>R4A</b>	525	200	39000	48000	0.017
0.3750	0.8750	0.2812	0.2188	<b>R6</b>	745	315	31000	38000	0.024
0.5000	1.1250	0.3125	0.2500	<b>R8</b>	1148	535	24000	29000	0.039
0.6250	1.3750	0.3438	0.2812	<b>R10</b>	1347	734	18000	22000	0.081
0.7500	1.6250	0.4375	0.3125	<b>R12</b>	1770	1020	16000	19000	0.100
0.8750	1.8750	0.5000	0.3750	<b>R14</b>	2270	1220	14000	17000	0.160
1.0000	2.0000	0.5000	0.3750	<b>R16</b>	2261	1350	13000	16000	0.190
1.1250	2.1250	0.5000	0.3750	<b>R18</b>	2810	1690	12000	14000	0.270
1.2500	2.2500	0.5000	0.3750	<b>R20</b>	3150	2090	11000	13000	0.300
1.3750	2.5000	0.5625	0.4375	<b>R22</b>	3480	2380	10000	12000	0.460
1.5000	2.6250	0.5625	0.4375	<b>R24</b>	3780	2650	9000	11000	0.510


\* Width of open bearing is narrower. Some sizes available with snap ring (NR suffix). Contact factory.  
Also available open (without shields or seals).

**IDC**  
**SELECT**

www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

INCH 1600 SERIES

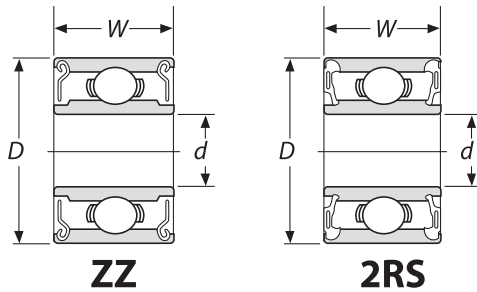

Bore in d	OD in D	Width (ZZ or Open) in W	Width (2RS) in W	Bearing Number	Basic Load Rating Pounds		Weight (lb)
					Dynamic	Static	
0.1875	0.6875	0.2500	0.3125	<b>1601</b>	491	194	0.015
0.2500	0.6875	0.2500	0.3125	<b>1602</b>	491	194	0.013
0.3125	0.8750	0.2812	0.3438	<b>1603</b>	747	317	0.024
0.3750	0.8750	0.2812	0.3438	<b>1604</b>	747	317	0.035
0.3125	0.9062	0.3125	0.3125	<b>1605</b>	935	390	0.026
0.3750	0.9062	0.3125	0.3125	<b>1606</b>	935	390	0.030
0.4375	0.9062	0.3125	0.3125	<b>1607</b>	935	390	0.035
0.3750	1.1250	0.3750	0.3750	<b>1614</b>	1047	465	0.077
0.4375	1.1250	0.3750	0.3750	<b>1615</b>	1047	465	0.071
0.5000	1.1250	0.3750	0.3750	<b>1616</b>	1047	465	0.066
0.4375	1.3750	0.4375	0.4375	<b>1620</b>	1525	747	0.110
0.5000	1.3750	0.4375	0.4375	<b>1621</b>	1525	747	0.106
0.5625	1.3750	0.4375	0.4375	<b>1622</b>	1525	747	0.101
0.6250	1.3750	0.4375	0.4375	<b>1623</b>	1525	747	0.088
0.6250	1.6250	0.5000	0.5000	<b>1628</b>	2109	1150	0.159
0.7500	1.6250	0.5000	0.5000	<b>1630</b>	2109	1150	0.143
0.6250	1.7500	0.5000	0.5000	<b>1633</b>	2109	1150	0.203
0.7500	1.7500	0.5000	0.5000	<b>1635</b>	2109	1150	0.187
0.7500	2.0000	0.5625	0.5625	<b>1638</b>	3150	1785	0.265
0.8750	2.0000	0.5625	0.5625	<b>1640</b>	3150	1785	0.247
1.0000	2.0000	0.5625	0.5625	<b>1641</b>	3150	1785	0.221
1.1250	2.5000	0.6250	0.6250	<b>1652</b>	2880	1890	0.463
1.2500	2.5000	0.6250	0.6250	<b>1654</b>	2880	1890	0.419
1.2500	2.5625	0.6875	0.6875	<b>1657</b>	3369	2251	0.474
1.3125	2.5625	0.6875	0.6875	<b>1658</b>	3369	2251	0.441


\* Some sizes available with snap ring (NR suffix). Contact factory.

**IDC**  
**SELECT**

www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS


## METRIC 440C STAINLESS

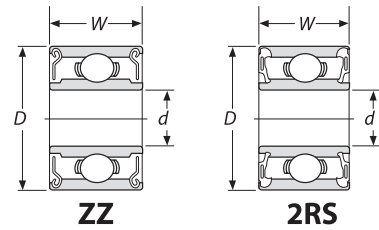

Bore mm d	OD mm D	Width mm W	Bearing Number	Basic Load Rating		Speed Rating		Weight (lb)
				Dynamic Pounds	Static Pounds	Grease RPM	Oil RPM	
8	22	7	<b>SS608</b>	740	310	34000	40000	0.030
10	26	8	<b>SS6000</b>	1030	440	29000	34000	0.042
10	30	9	<b>SS6200</b>	1150	540	18000	30000	0.070
12	28	8	<b>SS6001</b>	1150	540	26000	30000	0.050
12	32	10	<b>SS6201</b>	1530	690	22000	26000	0.060
15	32	9	<b>SS6002</b>	1260	640	15000	28000	0.070
15	35	11	<b>SS6202</b>	1740	805	19000	23000	0.100
17	35	10	<b>SS6003</b>	1350	730	13000	26000	0.090
17	40	12	<b>SS6203</b>	2150	1080	12000	20000	0.150
20	42	12	<b>SS6004</b>	2110	1140	18000	21000	0.150
20	47	14	<b>SS6204</b>	2880	1490	11000	20000	0.240
25	47	12	<b>SS6005</b>	2260	1320	15000	18000	0.180
25	52	15	<b>SS6205</b>	3150	1770	9000	15000	0.280
30	55	13	<b>SS6006</b>	2970	1860	13000	15000	0.260
30	62	16	<b>SS6206</b>	4390	2540	11000	13000	0.440
35	62	14	<b>SS6007</b>	3600	2310	12000	14000	0.340
35	72	17	<b>SS6207</b>	5800	3400	9800	11000	0.630
40	68	15	<b>SS6008</b>	3750	2590	10000	12000	0.420

\* Cages and shields are constructed of 304 stainless. Larger sizes available upon request. Consult factory.

## FLANGED INCH 440C STAINLESS



Bore in d	OD in D	Width B Open	Width B 1 or 2 Shields	Bearing Number	Flanged OD Df	Flanged Width Bf
.1250	0.3750	.1562	.1562	<b>SSFR2</b>	0.4400	.030
.1875	0.5000	.1562	.1960	<b>SSFR3</b>	0.5650	.042
.2500	0.6250	.1960	.1960	<b>SSFR4</b>	0.6900	.042
.3750	0.8750	.2188	.2812	<b>SSFR6</b>	0.9690	.062
.5000	1.1250	.2500	.3125	<b>SSFR8</b>	1.2250	.062


\* Flanged R Series also available in non-stainless, 52100 steel.

**IDC**  
**SELECT**


www.IDC-USA.com • 317-244-9200

# MINIATURE BALL BEARINGS

## INCH 440C STAINLESS "R" SERIES



**ZZ**



**2RS**



Bore in d	OD in D	Width (ZZ or 2RS) in W	Width (Open) in W	Bearing Number	Basic Load Rating Pounds		Speed Rating		Weight (lb)
					Dynamic	Static	Grease RPM	Oil RPM	
0.1250	0.375	0.1562	0.1562	<b>SSR2</b>	144	50	49000	58000	0.003
0.1250	0.500	0.1719	0.1719	<b>SSR2A</b>	254	90	31000	51000	0.004
0.1875	0.500	0.1960	0.1562	<b>SSR3</b>	295	110	41000	48000	0.005
0.2500	0.625	0.1960	0.1960	<b>SSR4</b>	335	139	44000	54000	0.010
0.2500	0.750	0.2812	0.2188	<b>SSR4A</b>	525	200	39000	48000	0.017
0.3750	0.875	0.2812	0.2188	<b>SSR6</b>	745	315	31000	38000	0.024
0.5000	1.125	0.3125	0.2500	<b>SSR8</b>	1148	535	24000	29000	0.039
0.6250	1.375	0.3438	0.2812	<b>SSR10</b>	1347	734	18000	22000	0.081

\* Cages and shields are constructed of 304 stainless.

## INCH "INSTRUMENT TYPE" 440C STAINLESS

Bore in d	OD in D	Width in W	Bearing Number	Basic Load Rating Pounds		Speed Rating Grease RPM	Weight (lb)
				Dynamic	Static		
0.0937	0.1875	0.0937	<b>SSRI3332ZZ</b>	28	9	73000	0.001
0.1250	0.2500	0.1094	<b>SSRI418ZZ</b>	64	22	59000	0.001
0.1250	0.3125	0.1406	<b>SSRI518ZZ</b>	126	40	54000	0.002
0.1250	0.3750	0.1406	<b>SSRI618ZZ</b>	144	51	49000	0.002
0.1562	0.3125	0.1250	<b>SSRI5532ZZ</b>	75	30	51000	0.001
0.1875	0.3125	0.1250	<b>SSRI5632ZZ</b>	85	30	49000	0.001
0.1875	0.3750	0.1250	<b>SSRI6632ZZ</b>	160	60	46000	0.002
0.2500	0.3750	0.1250	<b>SSRI614ZZ</b>	45	22	43000	0.002
0.2500	0.5000	0.1875	<b>SSRI814ZZ</b>	185	80	39000	0.004
0.3125	0.5000	0.1562	<b>SSRI8516ZZ</b>	121	62	40000	0.003
0.3750	0.6250	0.1562	<b>SSRI1038ZZ</b>	96	53	30000	0.006
0.5000	0.7500	0.1562	<b>SSRI1212ZZ</b>	111	71	24000	0.007


\* Open 2RS or LL (Teflon seals) may also be available. Open width may vary.  
Also available in ABEC 3 & 5 precision. Contact factory.

**IDC  
SELECT**


www.IDC-USA.com • 317-244-9200

# RADIAL BALL BEARINGS

## SPECIALS



**ZZ**



**2RS**

Bore in d	OD in D	Width in W	Bearing Number	Special Features
0.315	0.866	.236	<b>X117</b>	Special size bearing, open, light oil
0.3937	1.023	.3937	<b>W60002RS</b>	6000 2RS bearing wider than standard
0.500	1.375	.500	<b>LG 1/2</b>	Precision bearing replaces unground flanged bearings on lawn equipment
0.500	1.260	.394	<b>6201x1/2</b>	6201 bearing with .500 bore
0.500	1.378	.433	<b>6202x1/2</b>	6202 bearing with .500 bore
0.625	1.375	.500	<b>LG 5/8</b>	Precision bearing replaces unground flanged bearings on lawn equipment
0.625	1.375	.433	<b>99502H</b>	6202 2RS bearing with .625 bore, 1.375 O.D.
0.625	1.375	.433	<b>499502H</b>	6202 2RS bearing with .625 bore, 1.375 O.D., snap ring
0.625	1.378	.433	<b>6202x5/8</b>	6202 bearing with .625 bore
0.625	1.575	.472	<b>6203x5/8</b>	6203 bearing with .625 bore
0.640	1.5748	.720	<b>203KRR2</b>	Agricultural bearing with trash seal
0.750	1.575	.472	<b>6203x3/4</b>	6203 bearing with .750 bore
0.750	1.7805	.610	<b>Z9504B</b>	Special bearing with .610 width, 2 full contact seals
0.750	1.850	.551	<b>6204x3/4</b>	6204 bearing with .750 bore
0.750	1.625	.562	<b>LG 3/4</b>	Precision bearing replaces unground flanged bearings on lawn equipment
0.750	2.047	.8267	<b>559339x3/4</b>	Motorcycle wheel bearing
0.875	1.850	.551	<b>6204x7/8</b>	6204 bearing with .875 bore
1.000	2.047	.591	<b>6205x1</b>	6205 bearing with 1.00 bore
1.000	2.000	.625	<b>LG 1</b>	Precision bearing replaces unground flanged bearings on lawn equipment
1.000	2.047	.8267	<b>559339x1</b>	Motorcycle wheel bearing
1.1810	2.165	.9050	<b>A3917</b>	30mm bore double row bearing
1.250	2.835	.748	<b>6306x1-1/4</b>	6306 bearing with 1.250 bore

**IDC**  
**SELECT**

www.IDC-USA.com • 317-244-9200